

## ELLE

### Version

Island 180 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122362533



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Perimeter suction  
Electronic control  
Optional combined regenaleble  
Carbon.Zeo filter  
Optional remote control  
Dynamic LED Light (2700K -  
5600K)

Strip Led 3000K until 03.31.22

## OPTIONAL ACCESSORIES

### KACL.961

Charcoal and Zeolite filter

### 105080053

Remote control

## TECHNICAL FEATURES

### Installation type

Island

### Dimensions

180 cm

### Finishing

Matt black painted steel

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Lighting

Strip Led - 2700 K / 5600 K

### Minimum distance

Gas hob: 63 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

62 kg

### Net weight

51.3 kg

### Volumes

0.67 m<sup>3</sup>

### Packaging size

Length

1905 mm

Height

475 mm

Depth

725 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

## MOTOR TECHNICAL SHEET

### Maximum capacity

670 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


500 Pa

### Max. motor power

215 W

## ENERGY CLASS

C



Falmec\_Elle

## ELLE

### Version

Island 180 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122362533

## MOTOR TECHNICAL SHEET

| Motor speed                                            | 1   | 2   | 3   | 4   |
|--------------------------------------------------------|-----|-----|-----|-----|
| Noise level<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 49  | 55  | 61  | 67  |
| Capacity (m <sup>3</sup> /h)<br>I.E.C.61591            | 270 | 360 | 470 | 670 |
| Maximum pressure (Pa)                                  | 390 | 420 | 460 | 500 |
| Motor Power (W)                                        | 134 | 156 | 180 | 215 |
| Air outlet                                             | 150 | 150 | 150 | 150 |

## CAPACITY / PRESSURE



## ELLE

### Version

Island 180 cm - 800 m3/h


### Collection

Design

### EAN code

8034122362533

## ENERGY LABEL

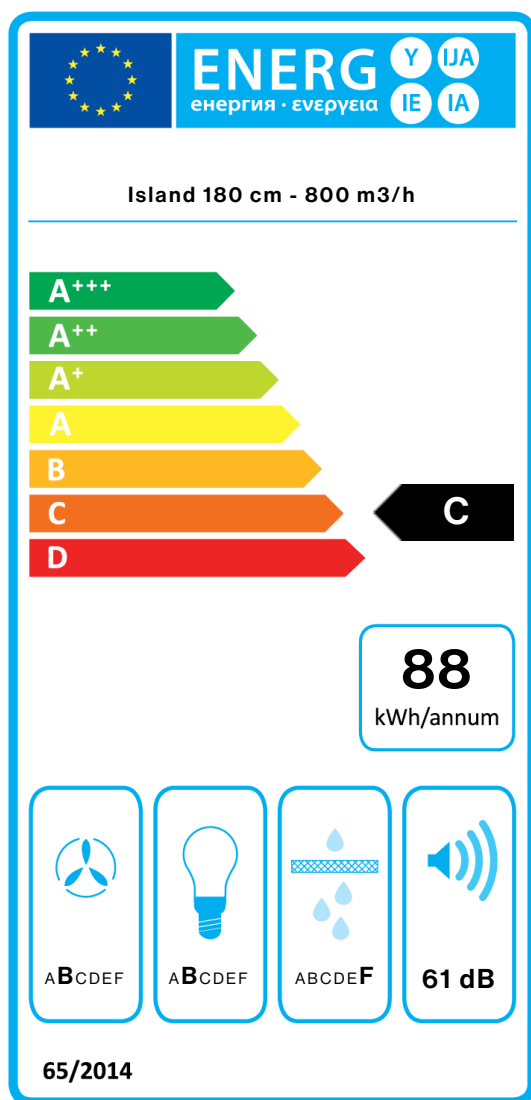

| PF         |                          |       |
|------------|--------------------------|-------|
| S          | Falmec Spa               |       |
| M          | Island 180 cm - 800 m3/h |       |
| AEC        | 87,8                     | kWh/a |
| EEC        | C                        |       |
| FDE        | 25,5                     |       |
| FDEC       | B                        |       |
| LE         | 20,9                     |       |
| LEC        | B                        |       |
| GFE        | 53,0                     |       |
| GFEC       | F                        |       |
| Qmin       | 270,0                    | m³/h  |
| Qmax       | 470,0                    | m³/h  |
| Qboost     | 670,0                    | m³/h  |
| SPEmin     | 49                       | dBa   |
| SPEmax     | 61                       | dBa   |
| SPEboost   | 67                       | dBa   |
| PO         | -                        | W     |
| PS         | 0,48                     | W     |
| PI         |                          |       |
| F          | 1.1                      |       |
| EEL        | 74,4                     |       |
| Qbep       | 333,0                    | m³/h  |
| Pbep       | 407                      | Pa    |
| Qboost     | 670,0                    | m³/h  |
| Wbep       | 147,7                    | W     |
| WL         | 39,00                    | W     |
| Emiddle    | 815                      | lux   |
| Lwa-SPEmax | 61                       | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.